

Not to scale.



PRODUCT DESCRIPTION

ProChannel Ci Cladding Support system with Grip-Deck TubeSeal[®] technology is a thermally efficient structural exterior rainscreen wall cladding attachment system that is intended to minimize penetrations through the insulation and AWRB layers. This system can be installed with the hat channel running horizontally or vertically depending on substrate and wall assembly *




**Please contact Trufast Walls for technical support.*

- Creates a 7/8" vented rainscreen air cavity
- Standard 12'-0" length
- Thermal performance and load capacity tables available
- Stocked in 54 mils (16ga) galvanized CP90 steel.
- 1-1/2" wide flange for cladding screw attachment.
- Prepunched holes in flange at 1" o.c. for all screw spacings.
- Slotted holes for moisture weeping and ventilation
- Also available in anodized black.

FASTENER DETAIL

The Grip-Deck TubeSeal[®] fastening system from TruFast Walls[®] helps seal the blind fastener penetration at the AWRB behind the layer of continuous insulation. Thermal-bridging is also reduced by the TubeSeal which prevents contact between the screw and the channel, creating a thermal-break. Screws available in HiLo (for wood) or SDS (for 12-18 gauge steel studs.)

PRODUCT SPECIFICATIONS

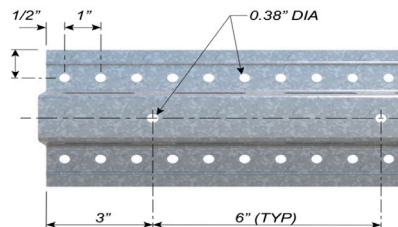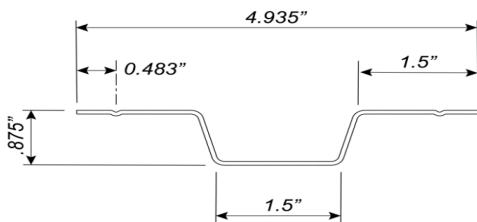

FASTENER SELECTION

Part No.	Fastener Type	Part Length for Nom. Thickness	Pkg. Qty.	Pkg. Wt.
HCTS-HL-1000	HiLo	1" insulation	250 pcs. / 500 pcs.	4.9 lbs. / 9.8 lbs.
HCTS-HL-1500	HiLo	1.5" insulation	250 pcs. / 500 pcs.	5.9 lbs. / 10.8 lbs.
HCTS-HL-2000	HiLo	2" insulation	250 pcs. / 500 pcs.	7.2 lbs. / 11.8 lbs.
HCTS-HL-2500	HiLo	2.5" insulation	250 pcs. / 500 pcs.	8.4 lbs. / 12 lbs.
HCTS-HL-3000	HiLo	3" insulation	250 pcs. / 500 pcs.	9.1 lbs. / 16 lbs.
HCTS-HL-3500	HiLo	3.5" insulation	250 pcs. / 500 pcs.	9.9 lbs. / 16 lbs.
HCTS-HL-4000	HiLo	4" insulation	250 pcs. / 500 pcs.	10.2 lbs. / 17 lbs.
HCTS-SD-1000	SDS	1" insulation	250 pcs. / 500 pcs.	4.9 lbs. / 9.8 lbs.
HCTS-SD-1500	SDS	1.5" insulation	250 pcs. / 500 pcs.	5.9 lbs. / 10.8 lbs.
HCTS-SD-2000	SDS	2" insulation	250 pcs. / 500 pcs.	7.2 lbs. / 11.8 lbs.
HCTS-SD-2500	SDS	2.5" insulation	250 pcs. / 500 pcs.	8.4 lbs. / 14 lbs.
HCTS-SD-3000	SDS	3" insulation	250 pcs. / 500 pcs.	9.1 lbs. / 15 lbs.
HCTS-SD-3500	SDS	3.5" insulation	250 pcs. / 500 pcs.	9.9 lbs. / 16 lbs.
HCTS-SD-4000	SDS	4" insulation	250 pcs. / 500 pcs.	10.2 lbs. / 17 lbs.