


ProChannel Ci™ Hat Channel - Vertical

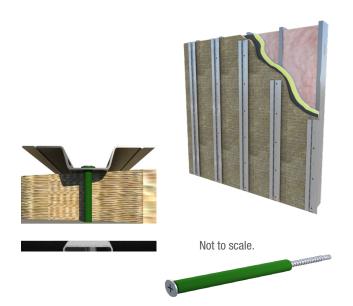

PRODUCT DESCRIPTION

ProChannel Ci Cladding Support system with Grip-Deck TubeSeal® technology is a thermally efficient structural exterior rainscreen wall cladding attachment system that is intended to minimize penetrations through the insulation and AWRB layers.


Please contact Trufast Walls for technical support.


- Creates a 7/8" vented rainscreen air cavity
- Standard 12'-0" length
- Thermal performance and load capacity tables available
- Stocked in 54 mils (16ga) galvanized CP90 steel.
- 1-1/2" wide dual flanges for cladding screw attachment.
- Prepunched holes at 6" o.c. for screw spacings.
- Slotted holes for moisture weeping and ventilation
- · Also available in anodized black.


FASTENER DETAIL

The Grip-Deck TubeSeal® fastening system from TruFast Walls® helps seal the blind fastener penetration at the AWRB behind the layer of continuous insulation. Thermal-bridging is also reduced by the TubeSeal which prevents contact between the screw and the channel, creating a thermal-break. Screws available in HiLo (for wood) or SDS (for 12-18 gauge steel studs.)

PRODUCT SPECIFICATIONS







FASTENER SELECTION

Part No.	Fastener Type	Part Length for Nom. Thickness	Pkg. Qty.	Pkg. Wt.
HCTS-HL-1000	HiLo	1" insulation	250 pcs. / 500 pcs.	4.9 lbs. / 9.8 lbs.
HCTS-HL-1500	HiLo	1.5" insulation	250 pcs. / 500 pcs.	5.9 lbs. / 10.8 lbs.
HCTS-HL-2000	HiLo	2" insulation	250 pcs. / 500 pcs.	7.2 lbs. / 11.8 lbs.
HCTS-HL-2500	HiLo	2.5" insulation	250 pcs. / 500 pcs.	8.4 lbs. / 12 lbs.
HCTS-HL-3000	HiLo	3" insulation	250 pcs. / 500 pcs.	9.1 lbs. / 16 lbs.
HCTS-HL-3500	HiLo	3.5" insulation	250 pcs. / 500 pcs.	9.9 lbs. / 16 lbs.
HCTS-HL-4000	HiLo	4" insulation	250 pcs. / 500 pcs.	10.2 lbs. / 17 lbs.
HCTS-SD-1000	SDS	1" insulation	250 pcs. / 500 pcs.	4.9 lbs. / 9.8 lbs.
HCTS-SD-1500	SDS	1.5" insulation	250 pcs. / 500 pcs.	5.9 lbs. / 10.8 lbs.
HCTS-SD-2000	SDS	2" insulation	250 pcs. / 500 pcs.	7.2 lbs. / 11.8 lbs.
HCTS-SD-2500	SDS	2.5" insulation	250 pcs. / 500 pcs.	8.4 lbs. / 14 lbs.
HCTS-SD-3000	SDS	3" insulation	250 pcs. / 500 pcs.	9.1 lbs. / 15 lbs.
HCTS-SD-3500	SDS	3.5" insulation	250 pcs. / 500 pcs.	9.9 lbs. / 16 lbs.
HCTS-SD-4000	SDS	4" insulation	250 pcs. / 500 pcs.	10.2 lbs. / 17 lbs.